

A70Q

Amp-Trap® Form 101

HIGH SPEED FUSES



A70Q Amp-Trap® high speed fuses were developed for inverter applications requiring extremely low I²t. A70Q fuses provide the most responsive protection for applications not required to sustain heavy overloads. Typically used for replacement purposes.

FEATURES/BENEFITS:

- Lowest I²t of any fuse in this voltage rating for best overall protection
- 700V AC, 650V DC rating allows protection of greater variety of circuits
- Solid fill technology for extra reliability in performance

Catalog Numbering System				
A	70	Q	500	- 4
Amp-Trap® Fuse	Rated Volts - 700	Style	Amperes*	Mounting Types* Blades, bolt-in: 4

* For ampere ratings and styles not listed, call Technical Services at 978-465-4853.

RATINGS

- **Volts:** 700VAC, 650VDC
- **Amps:** 35 to 600A
- **I.R.:** 100kA I.R. AC/DC
- **LR:** 10ms

HIGHLIGHTS:

- Extremely fast acting
- Current limiting
- Lowest I²t

APPLICATIONS:

- Protection of inverters and other equipment requiring the best AC or DC protection in this voltage range

APPROVALS:

- UL recognized component
UL File E60314 
- AC: guide no. JFHR2
- DC: tested to UL standard 198L parameters (35-600A)

SINGLE POLE FUSE BLOCKS FOR A70Q FUSES

Fuse Ampere Rating	Catalog No.
35-100	P243C
125-400	P266A
450-600	P266F



CATALOG NUMBERS (AMPS)

A70Q35-4	A70Q70-4	A70Q125-4	A70Q250-4	A70Q450-4
A70Q40-4	A70Q80-4	A70Q150-4	A70Q300-4	A70Q500-4
A70Q50-4	A70Q90-4	A70Q175-4	A70Q350-4	A70Q600-4
A70Q60-4	A70Q100-4	A70Q200-4	A70Q400-4	

* For ampere ratings and styles not listed, call Technical Services at 978-465-4853.

DIMENSIONS

Catalog No.	Mounting Type	Dimensions - Inches (mm)							
		A	B	C	D	E	F	G	H
A70Q35 to 60	4	4.37	1.22	1.96	3.69	2.91	.34	1.00	.19
		{111}	{31.0}	{49.8}	{93.7}	{73.9}	{8.6}	{25.4}	{4.8}
A70Q70 to 100	4	4.37	1.22	1.96	3.69	2.91	.41	1.00	.19
		{111}	{31.0}	{49.8}	{93.7}	{73.9}	{10.4}	{25.4}	{4.8}
A70Q125 to 200	4	5.09	1.50	1.96	4.16	2.91	.41	1.00	.25
		{129}	{38.1}	{49.8}	{106}	{73.9}	{10.4}	{25.4}	{6.4}
A70Q250 to 400	4	5.09	2.00	1.96	4.00	2.94	.56	1.50	.25
		{129}	{50.8}	{49.8}	{102}	{74.7}	{14.2}	{38.1}	{6.4}
A70Q450 to 600	4	7.09	2.50	1.96	5.72	3.25	.56	2.00	.38
		{180}	{63.5}	{49.8}	{145}	{82.6}	{14.2}	{50.8}	{9.7}

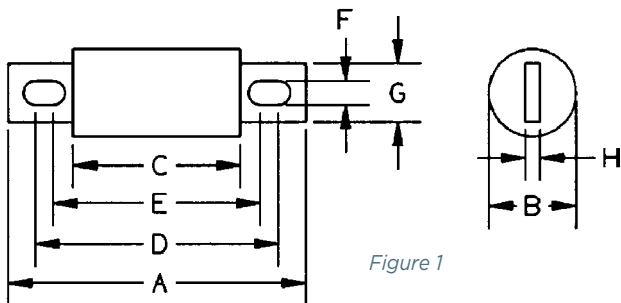


Figure 1