



Fast Recovery
Avalanche Diode
Type DFA333-320-22

Low switching losses
Low reverse recovery charge
High power cycling capability

Average forward current		I_{FAV}	320 A
Repetitive peak reverse voltage		V_{RRM}	1800...2200 V
Reverse recovery time		t_{rr}	2.50, 3.20, 4.00, 5.00 μ s
V_{RRM}, V	1800	2000	2200
Voltage code	18	20	22
$T_j, ^\circ C$	- 60...+125		

MAXIMUM ALLOWABLE RATINGS


Symbols and parameters		Units	Values	Test conditions
ON-STATE				
I_{FAV}	Average forward current	A	320	$T_c=85^\circ C$; Double side cooled; 180° half-sine wave; 50 Hz
I_{FRMS}	RMS forward current	A	502	$T_c=85^\circ C$; Double side cooled; 180° half-sine wave; 50 Hz
I_{FSM}	Surge forward current	kA	6.5 7.5	$T_j=T_{jmax}$ $T_j=25^\circ C$ 180° half-sine wave; $t_p=10$ ms; single pulse; $V_R=0$ V;
			7.0 8.0	$T_j=T_{jmax}$ $T_j=25^\circ C$ 180° half-sine wave; $t_p=8.3$ ms; single pulse; $V_R=0$ V;
I^2t	Safety factor	$A^2s \cdot 10^3$	210 280	$T_j=T_{jmax}$ $T_j=25^\circ C$ 180° half-sine wave; $t_p=10$ ms; single pulse; $V_R=0$ V;
			200 260	$T_j=T_{jmax}$ $T_j=25^\circ C$ 180° half-sine wave; $t_p=8.3$ ms; single pulse; $V_R=0$ V;
BLOCKING				
V_{RRM}	Repetitive peak reverse voltages	V	1800...2200	$T_{jmin} < T_j < T_{jmax}$; 180° half-sine wave; 50 Hz;
V_{RSM}	Non-repetitive peak reverse voltages	V	1900...2300	$T_{jmin} < T_j < T_{jmax}$; 180° half-sine wave; single pulse;
$V_{(BR)}$	Breakdown voltage	V	2000...2400	$T_j=25^\circ C$; $I_{br}=100$ mA; $t_p = 10$ ms; 5 Hz
V_R	Reverse continuous voltages	V	$0.6 \cdot V_{RRM}$	$T_j=T_{jmax}$;
P_{RSM}	Surge reverse power dissipation	kW	16	$T_j= T_{jmax}$; $t_p = 100$ μ s; 180° half-sine current waveforms; single pulse
THERMAL				
T_{stg}	Storage temperature	$^\circ C$	-60...+55	
T_j	Operating junction temperature	$^\circ C$	-60...+125	
MECHANICAL				
F	Mounting force	kN	9.0...11.0	
a	Acceleration	m/s^2	50	Device clamped

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions
ON-STATE				
V_{FM}	Peak forward voltage, max	V	2.50	$T_j=25\text{ }^\circ\text{C}; I_{FM}=1005\text{ A}$
$V_{F(TO)}$	Forward threshold voltage, max	V	1.20	$T_j=T_{j\text{ max}};$ $0.5\pi I_{FAV} < I_T < 1.5\pi I_{FAV}$
r_T	Forward slope resistance, max	m Ω	1.65	
BLOCKING				
I_{RRM}	Repetitive peak reverse current, max	mA	40	$T_j=T_{j\text{ max}};$ $V_R=V_{RRM}$
SWITCHING				
Q_{rr}	Total recovered charge, max	μC	tbd*	$T_j=T_{j\text{ max}}; I_{FM}=I_{FAV};$ $di_R/dt=-100\text{ A}/\mu\text{S};$ $V_R=100\text{ V};$
t_{rr}	Reverse recovery time ¹⁾ , max	μS	2.50, 3.20, 4.00, 5.00	
I_{rrM}	Peak reverse recovery current, max	A	tbd*	
THERMAL				
R_{thjc}	Thermal resistance, junction to case, max	$^\circ\text{C}/\text{W}$	0.0500	Double side cooled
R_{thjc-A}			0.1100	Direct current
R_{thjc-K}			0.0900	Cathode side cooled
R_{thck}	Thermal resistance, case to heatsink, max	$^\circ\text{C}/\text{W}$	0.0090	Direct current
MECHANICAL				
w	Weight, max	g	180	
D_s	Surface creepage distance	mm (inch)	23.69 (0.933)	
D_a	Air strike distance	mm (inch)	19.10 (0.752)	

* **tbd** – data will be refined as additional tests are conducted and statistics are collected.

PART NUMBERING GUIDE						NOTES										
DFA	333	320	22	E4	N	¹⁾ Reverse recovery time <table border="1"> <thead> <tr> <th>Symbol of group</th> <th>M4</th> <th>K4</th> <th>H4</th> <th>E4</th> </tr> </thead> <tbody> <tr> <td>$t_{rr}, \mu\text{S}$</td> <td>2.50</td> <td>3.20</td> <td>4.00</td> <td>5.00</td> </tr> </tbody> </table>	Symbol of group	M4	K4	H4	E4	$t_{rr}, \mu\text{S}$	2.50	3.20	4.00	5.00
Symbol of group	M4	K4	H4	E4												
$t_{rr}, \mu\text{S}$	2.50	3.20	4.00	5.00												
1	2	3	4	5	6											
1. DFA – Fast recovery avalanche diode 2. Design version 3. Average forward current, A 4. Voltage code 5. Group of reverse recovery time 6. Ambient conditions: N – normal; T – tropical																

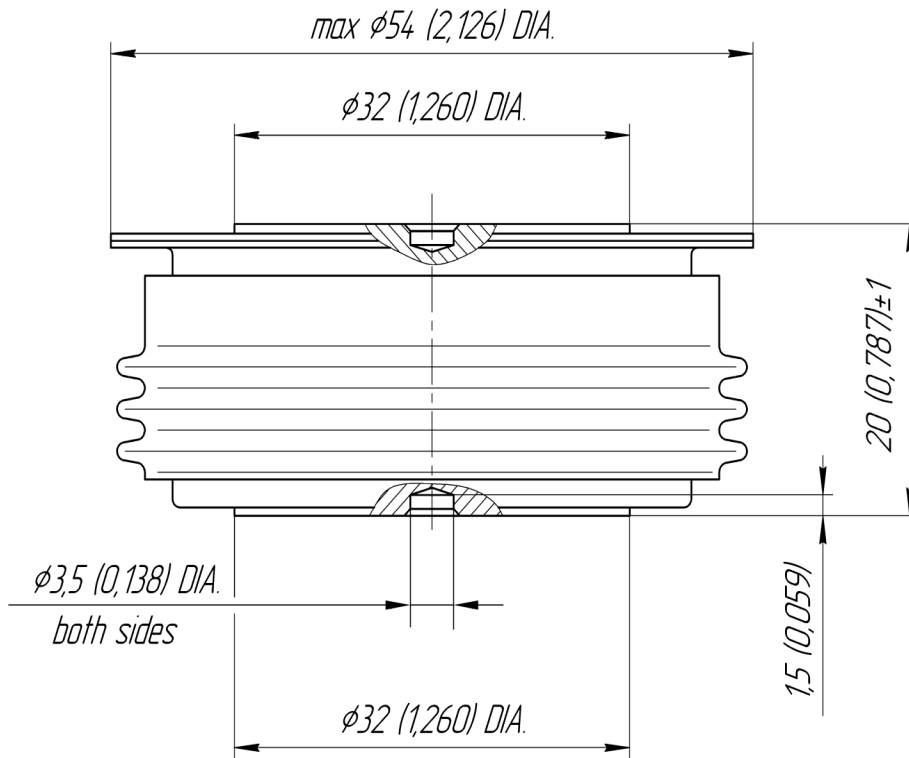

All dimensions in millimeters (inches)

The information contained herein is confidential and protected by Copyright.
In the interest of product improvement, Proton-Electrotex reserves the right to change data sheet without notice.