




Electrically isolated base plate
 Industrial standard package
 Simplified mechanical design, rapid assembly
 Pressure contact

**Double Diode Module
 For Phase Control
 MDx-320-65-A2**

Average forward current					I_{FAV}		320 A					
Repetitive peak reverse voltage					V_{RRM}		4600 ÷ 6500 V					
V_{RRM}, V	4600	4800	5000	5200	5400	5600	5800	6000	6200	6400	6500	
Voltage code	46	48	50	52	54	56	58	60	62	64	65	
$T_j, ^\circ C$	- 40 ÷ 140											

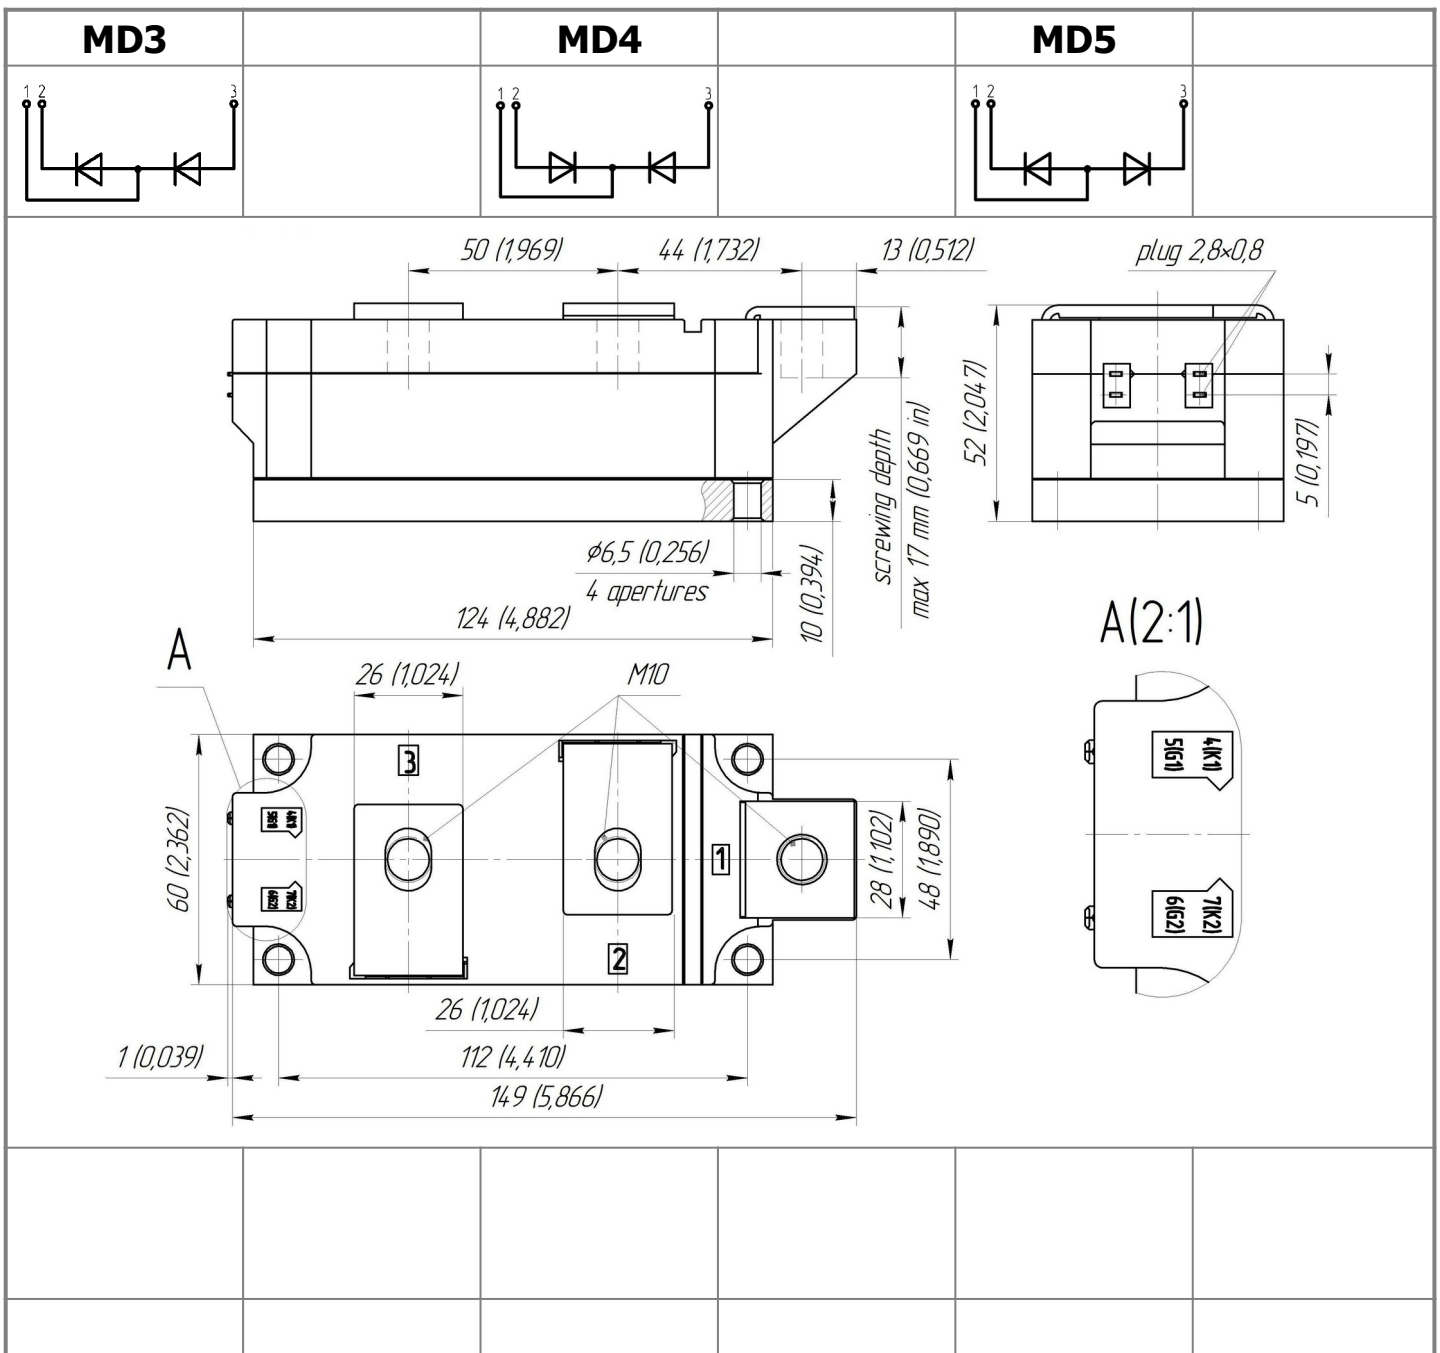


All dimensions in millimeters (inches)

MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{FAV}	Average forward current	A	320	$T_c=100\text{ }^\circ\text{C}$; 180° half-sine wave; 50 Hz	
I_{FRMS}	RMS forward current	A	502		
I_{FSM}	Surge forward current	kA	6.0 7.0	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^\circ\text{C}$	180° half-sine wave; $t_p=10\text{ ms}$; single pulse; $V_R=0\text{ V}$;
			6.5 7.5	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^\circ\text{C}$	180° half-sine wave; $t_p=8.3\text{ ms}$; single pulse; $V_R=0\text{ V}$;
I^2t	Safety factor	$A^2s\cdot 10^3$	180 240	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^\circ\text{C}$	180° half-sine wave; $t_p=10\text{ ms}$; single pulse; $V_R=0\text{ V}$;
			170 230	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^\circ\text{C}$	180° half-sine wave; $t_p=8.3\text{ ms}$; single pulse; $V_R=0\text{ V}$;
BLOCKING					
V_{RRM}	Repetitive peak reverse voltages	V	4600÷6500	$T_{j\text{ min}} < T_j < T_{j\text{ max}}$; 180° half-sine wave; 50 Hz;	
V_{RSM}	Non-repetitive peak reverse voltages	V	4700÷6600	$T_{j\text{ min}} < T_j < T_{j\text{ max}}$; 180° half-sine wave; single pulse;	
V_R	Reverse continuous voltages	V	$0.6\cdot V_{RRM}$	$T_j=T_{j\text{ max}}$;	
THERMAL					
T_{stg}	Storage temperature	$^\circ\text{C}$	-40 ÷ 50		
T_j	Operating junction temperature	$^\circ\text{C}$	-40 ÷ 140		
$T_{c\text{ op}}$	Operating temperature	$^\circ\text{C}$	- 40 ÷ 125		
MECHANICAL					
a	Acceleration under vibration	m/s^2	50		

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions	
ON-STATE					
V_{FM}	Peak forward voltage, max	V	2.40	$T_j=25\text{ }^\circ\text{C}$; $I_{FM}=1570\text{ A}$	
$V_{F(TO)}$	Forward threshold voltage, max	V	0.95	$T_j=T_{j\text{ max}}$;	
r_T	Forward slope resistance, max	$\text{m}\Omega$	1.100	$0.5\pi I_{FAV} < I_T < 1.5\pi I_{FAV}$	
BLOCKING					
I_{RRM}	Repetitive peak reverse current, max	mA	100	$T_j=T_{j\text{ max}}$; $V_R=V_{RRM}$	
THERMAL					
R_{thjc}	Thermal resistance, junction to case				
	per module	$^\circ\text{C/W}$	0.0340	180° half-sine wave, 50 Hz	
	per arm	$^\circ\text{C/W}$	0.0680		
	per module	$^\circ\text{C/W}$	0.0325	DC	
per arm	$^\circ\text{C/W}$	0.0650			
R_{thch}	Thermal resistance, case to heatsink				
	per module	$^\circ\text{C/W}$	0.0100		
	per arm	$^\circ\text{C/W}$	0.0200		
INSULATION					
V_{ISOL}	Insulation test voltage	kV	3.00	Sine wave, 50 Hz; RMS	$t=60\text{ sec}$
			3.60		$t=1\text{ sec}$
MECHANICAL					
M_1	Mounting torque (M6) ¹⁾	Nm	6.00	Tolerance $\pm 15\%$	
M_2	Terminal connection torque (M10) ¹⁾	Nm	12.00	Tolerance $\pm 15\%$	
w	Weight, max	g	1500		

PART NUMBERING GUIDE						NOTES				
MD	3	-	320	-	65	-	A2	-	N	
1	2		3		4		5		6	
1. MD - Rectifier Diode 2. Circuit Schematic: 3 – serial connection 4 – common Cathode 5 – common Anode 3. Average Forward Current, A 4. Voltage Code 5. Package Type (M.A2) 6. Ambient Conditions: N – Normal										
		UL certified file-No. E255404								

¹⁾ The screws must be lubricated

The information contained herein is confidential and protected by Copyright.
 In the interest of product improvement, Proton-Electrotex reserves the right to change data sheet without notice.