High power cycling capability
Low on-state and switching losses
Optimized for line frequency rectifiers
Designed for traction and industrial applications

Rectifier Diode
Type D353-1600-36

Average forward current		I_{FAV}	1600 A	
Repetitive peak reverse voltage		V_{RRM}	3000 ÷ 3600 V	
V_{RRM}, V	3000	3200	3400	3600
Voltage code	30	32	34	36
T_j, °C	-60 ÷ 175			

MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{FAV}	Average forward current	A	1600 2400	T_c=133 °C; Double side cooled; T_c=100 °C; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FRMS}	RMS forward current	A	2535	T_c=133 °C; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FSM}	Surge forward current	kA	26.0 30.0	T_j=$T_{j\,max}$ T_j=25 °C	180° half-sine wave; 50 Hz (t_p=10 ms); single pulse; V_R=0 V;
			28.0 32.0	T_j=$T_{j\,max}$ T_j=25 °C	180° half-sine wave; 60 Hz (t_p=8.3 ms); single pulse; V_R=0 V;
I^2t	Safety factor	$A^2s\cdot10^3$	3380 4500	T_j=$T_{j\,max}$ T_j=25 °C	180° half-sine wave; 50 Hz (t_p=10 ms); single pulse; V_R=0 V;
			3250 4245	T_j=$T_{j\,max}$ T_j=25 °C	180° half-sine wave; 60 Hz (t_p=8.3 ms); single pulse; V_R=0 V;
BLOCKING					
V_{RRM}	Repetitive peak reverse voltages	V	3000÷3600	$T_{j\,min}$< T_j <$T_{j\,max}$; 180° half-sine wave; 50 Hz;	
V_{RSM}	Non-repetitive peak reverse voltages	V	3100÷3700	$T_{j\,min}$< T_j <$T_{j\,max}$; 180° half-sine wave; 50 Hz;single pulse;	
V_R	Reverse continuous voltages	V	0.75·V_{RRM}	T_j=$T_{j\,max}$;	
THERMAL					
T_{stg}	Storage temperature	°C	-60÷50		
T_j	Operating junction temperature	°C	-60÷175		
MECHANICAL					
F	Mounting force	kN	24.0÷28.0		
a	Acceleration	m/s^2	50 100	Device unclamped Device clamped	

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions	
ON-STATE					
V_{FM}	Peak forward voltage, max	V	2.00	T_j=25 °C; I_{FM}=5024 A	
$V_{F(TO)}$	Forward threshold voltage, max	V	0.85	$T_j=T_{j\,max}$; 0.5 π I_{FAV} < I_T < 1.5 π I_{FAV}	
r_T	Forward slope resistance, max	mΩ	0.150		
BLOCKING					
I_{RRM}	Repetitive peak reverse current, max	mA	100	$T_j=T_{j\,max}$; $V_R=V_{RRM}$	
SWITCHING					
Q_{rr}	Total recovered charge, max	µC	3600	$T_j=T_{j\,max}$; I_{TM}=1600 A ; di_R/dt=-5 A/µs ; V_R=100 V	
t_{rr}	Reverse recovery time, max	µs	40.0		
I_{rrM}	Peak reverse recovery current, max	A	180		
THERMAL					
R_{thjc}	Thermal resistance, junction to case, max	°C/W	0.0180	Direct current	Double side cooled
R_{thjc-A}			0.0396		Anode side cooled
R_{thjc-K}			0.0324		Cathode side cooled
R_{thck}	Thermal resistance, case to heatsink, max	°C/W	0.0040	Direct current	
MECHANICAL					
w	Weight, typ	g	510		
D_s	Surface creepage distance	mm (inch)	38.84 (1.529)		
D_a	Air strike distance	mm (inch)	22.50 (0.886)		

PART NUMBERING GUIDE

D	353	1600	36	N
1	2	3	4	5

1. D — Rectifier Diode
2. Design version
3. Average forward current, A
4. Voltage code
5. Ambient conditions: N – normal; T – tropical

OVERALL DIMENSIONS

Package type: D.D3

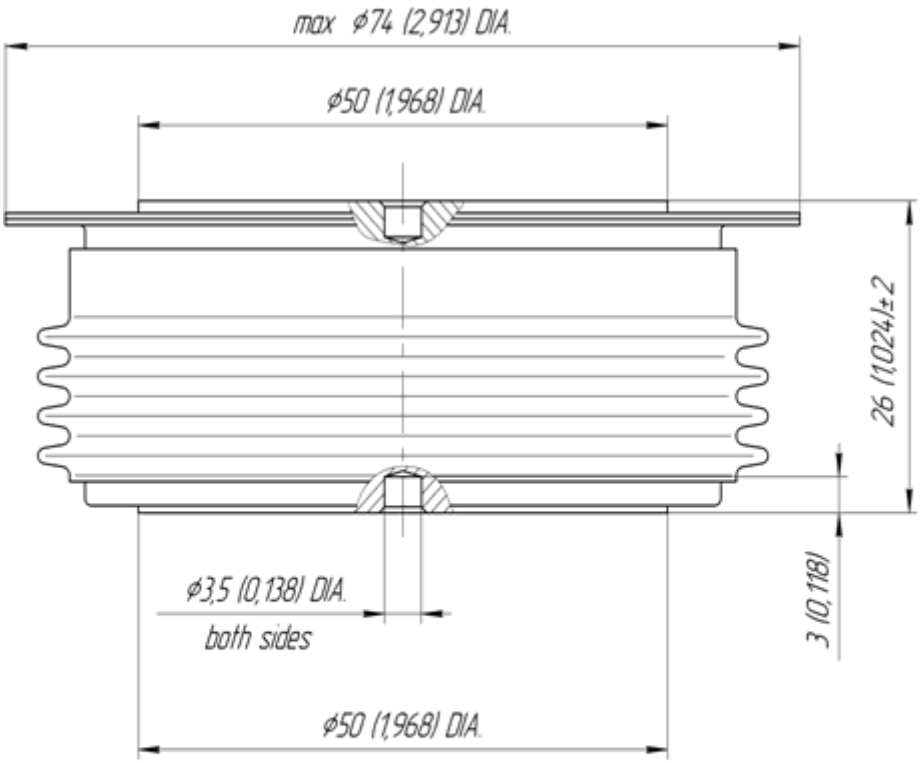

All dimensions in millimeters (inches)

The information contained herein is confidential and protected by Copyright.
In the interest of product improvement, Proton-Electrotex reserves the right to change data sheet without notice.

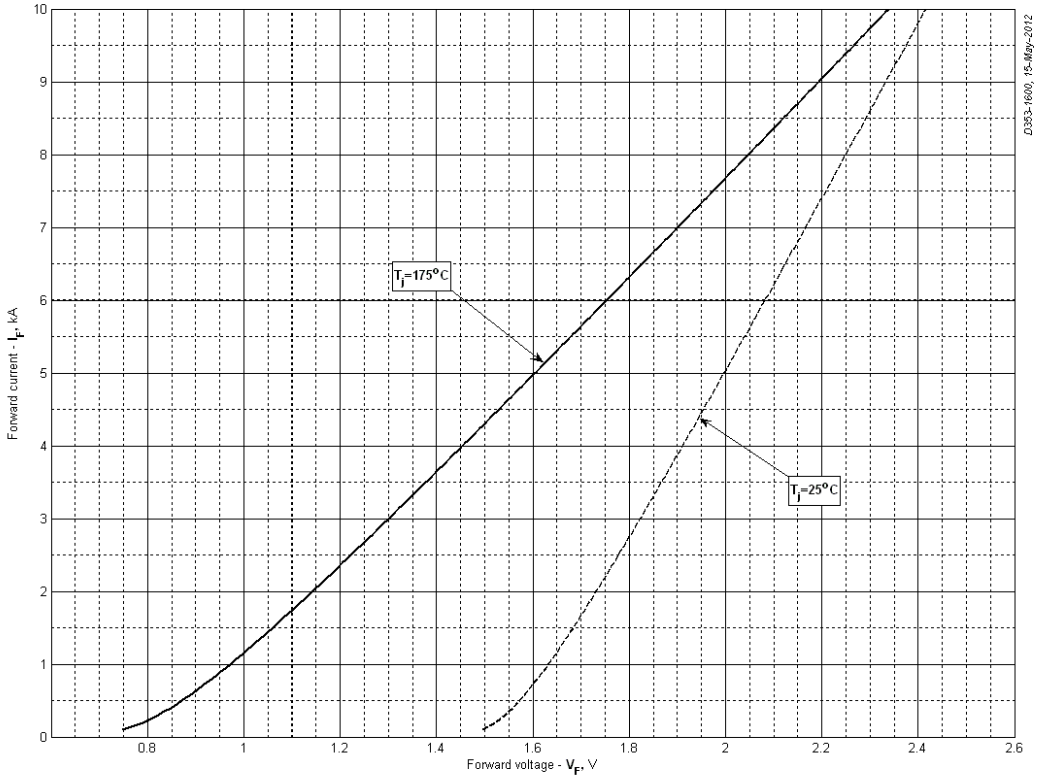

Fig 1 – Forward characteristics of Limit device

Analytical function for Forward characteristic:

$$V_F = A + B \cdot i_F + C \cdot \ln(i_F + 1) + D \cdot \sqrt{i_F}$$

	Coefficients for max curves	
	T_j = 25°C	$T_j = T_{j\,max}$
A	1.411680	0.619204
B	0.050140	0.096411
C	-0.195351	-0.293683
D	0.306428	0.460670

Forward characteristic model (see Fig. 1).

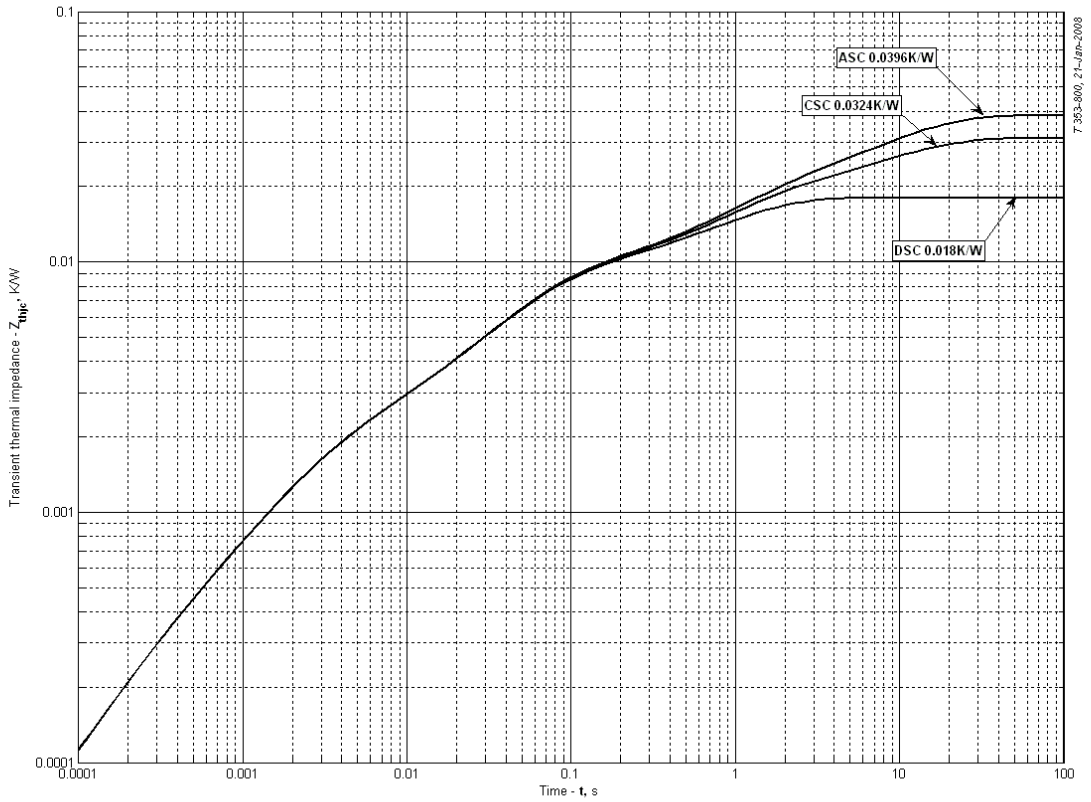

Fig 2 – Transient thermal impedance

Analytical function for Transient thermal impedance junction to case Z_{thjc} for DC:

$$Z_{thjc} = \sum_{i=1}^{n} R_i \left(1 - e^{-\frac{t}{\tau_i}} \right)$$

Where ***i*** = 1 to ***n***, ***n*** is the number of terms in the series.

t = Duration of heating pulse in seconds.

Z_{thjc} = Thermal resistance at time t.

R_i = Amplitude of p_{th} term.

τ_i = Time constatnt of r_{th} term.

DC Double side cooled

i	1	2	3	4	5	6
R_i, K/W	0.009241	0.006037	0.001231	0.001054	0.0003396	0.00009575
τ_i, s	0.9673	0.04967	0.002733	0.07734	0.001638	0.0002248

DC Cathode side cooled

i	1	2	3	4	5	6
R_i, K/W	0.01318	0.009281	0.006055	0.001018	0.001535	0.0001182
τ_i, s	9.745	1.028	0.05591	0.03732	0.002468	0.0002687

DC Anode side cooled

i	1	2	3	4	5	6
R_i, K/W	0.02041	0.009325	0.006949	0.0001252	0.001516	0.0001119
τ_i, s	9.752	1.065	0.05344	0.01407	0.002421	0.0002554

Transient thermal impedance junction to case Z_{thjc} model (see Fig. 2)

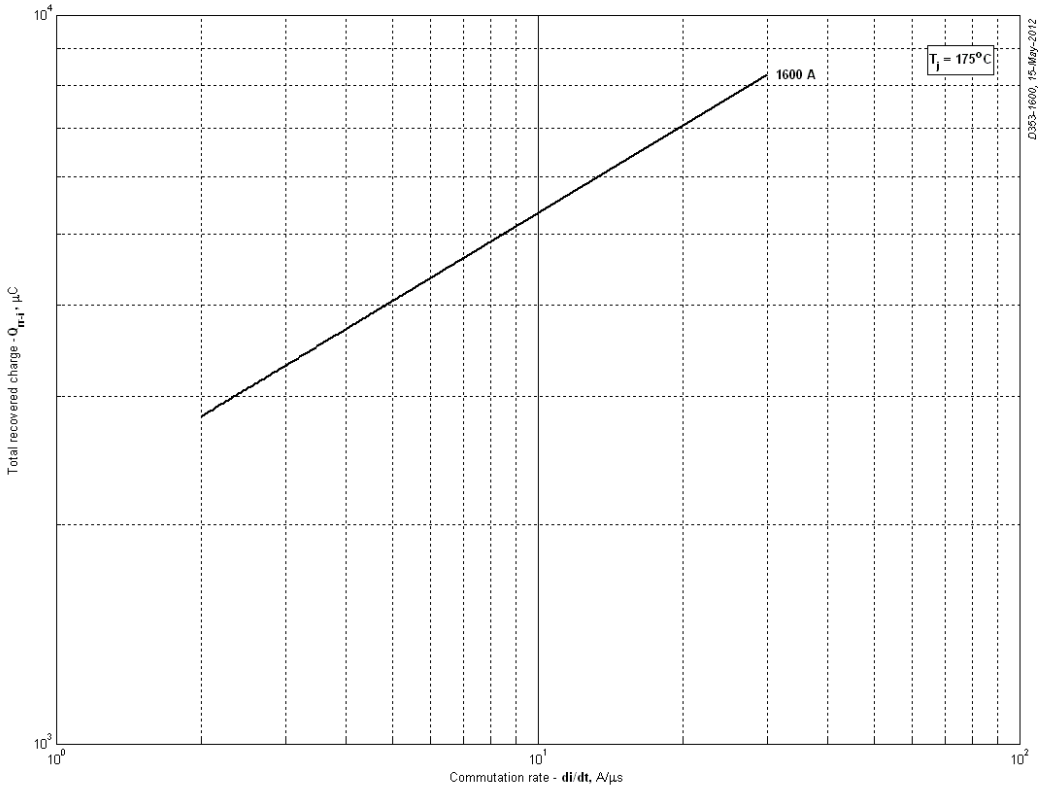

Fig 3 - Total recovered charge(integral), Q_{rr-i}

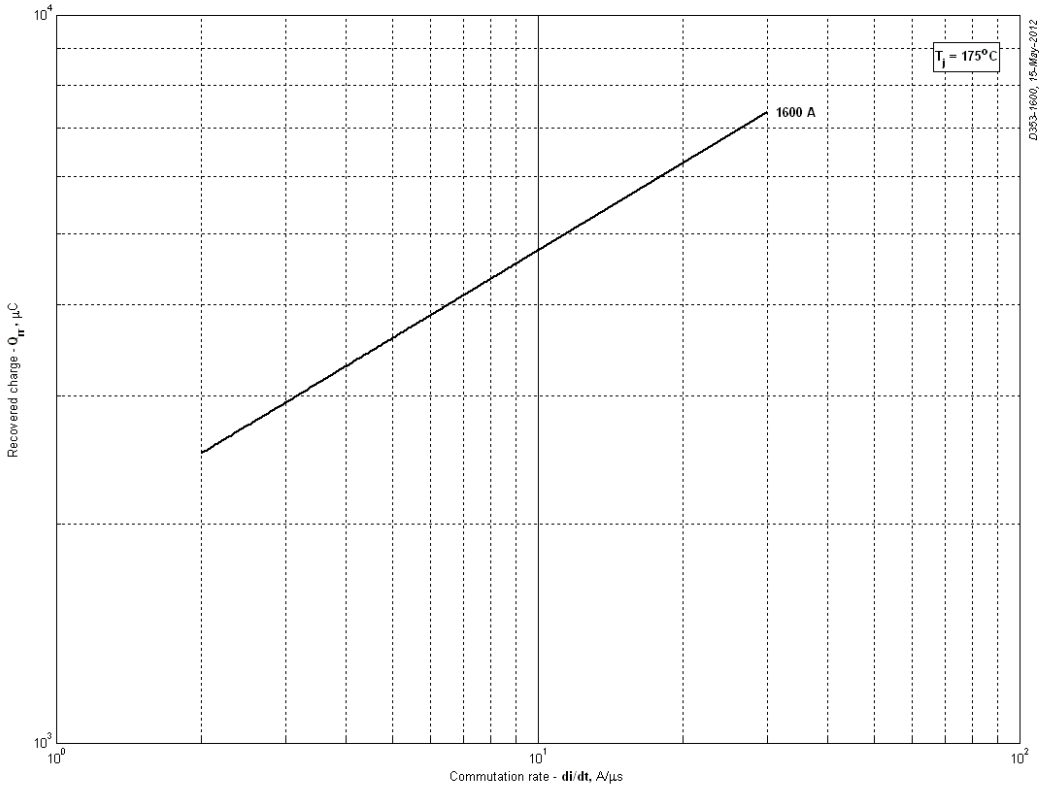

Fig 4 - Total recovered charge(50% chord), Q_{rr}

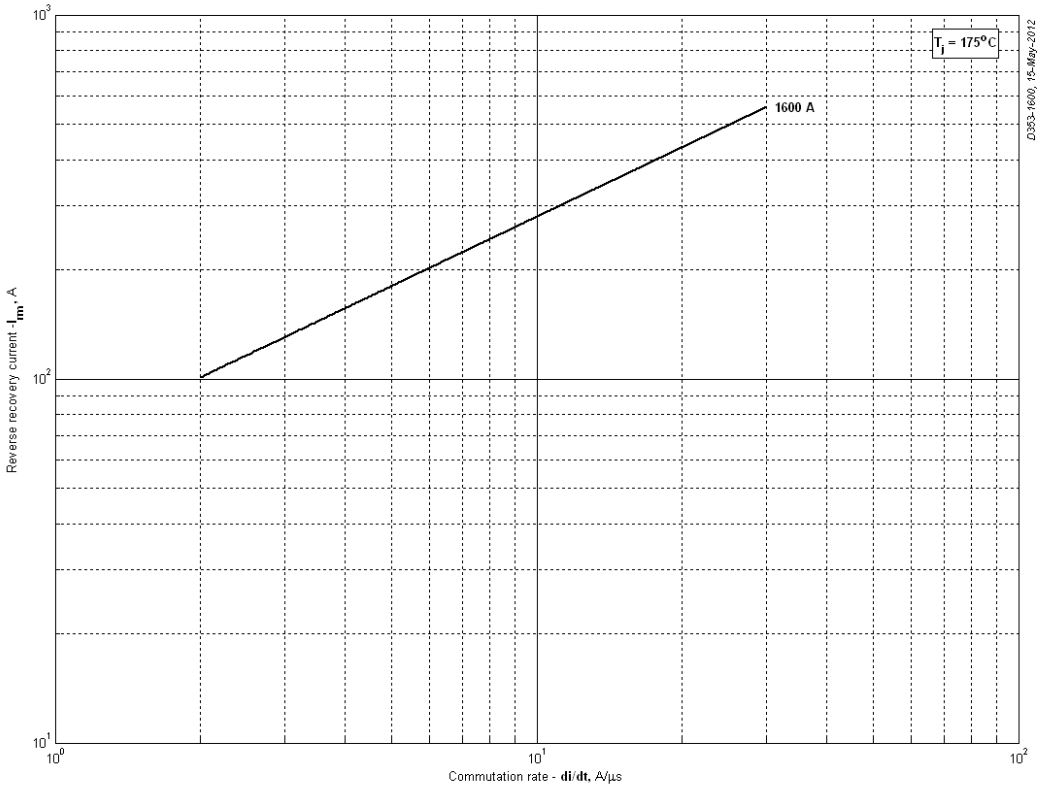

Fig 5 - Peak reverse recovery current, I_{rm}

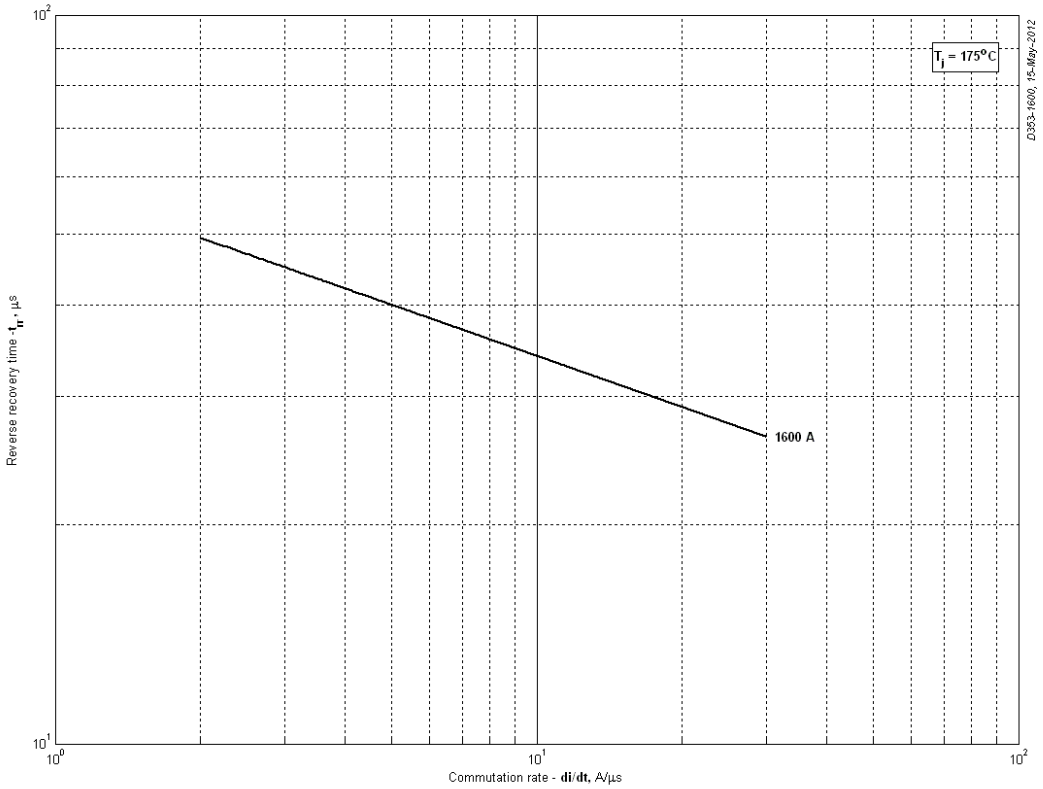

Fig 6 - Recovery time, t_{rr} (50% chord)

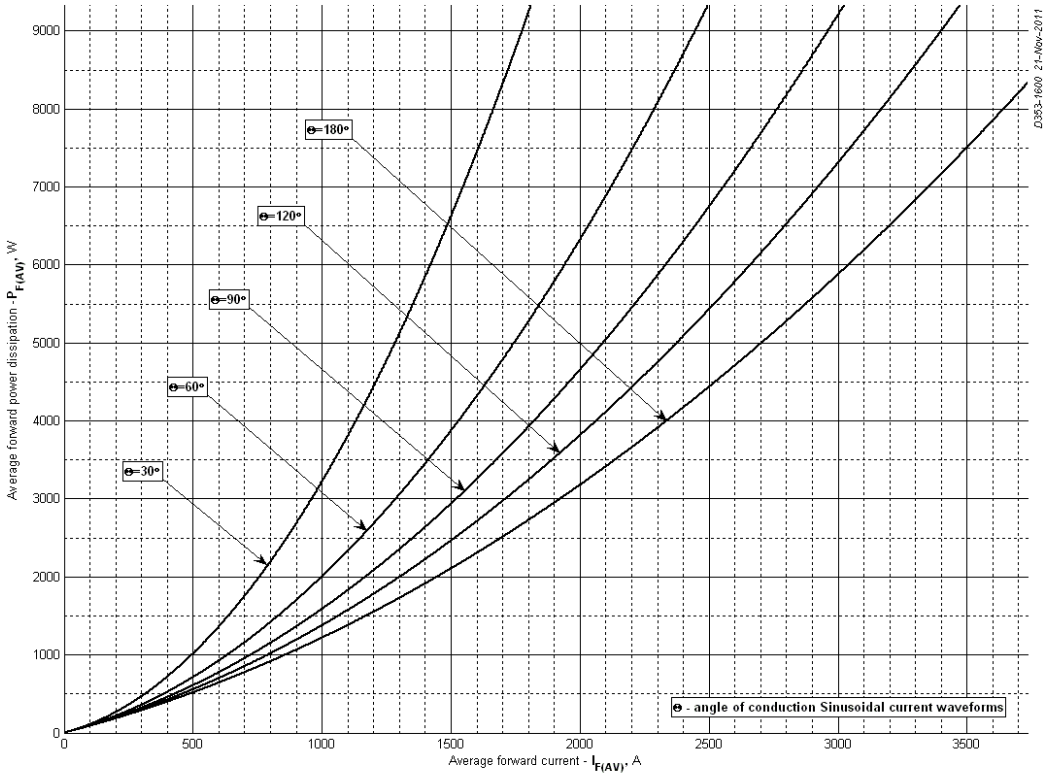

Fig 7 - Mean forward power dissipation P_{FAV} vs. Mean forward current I_{FAV} for sinusoidal current waveforms at different conduction angles (f=50Hz, DSC)

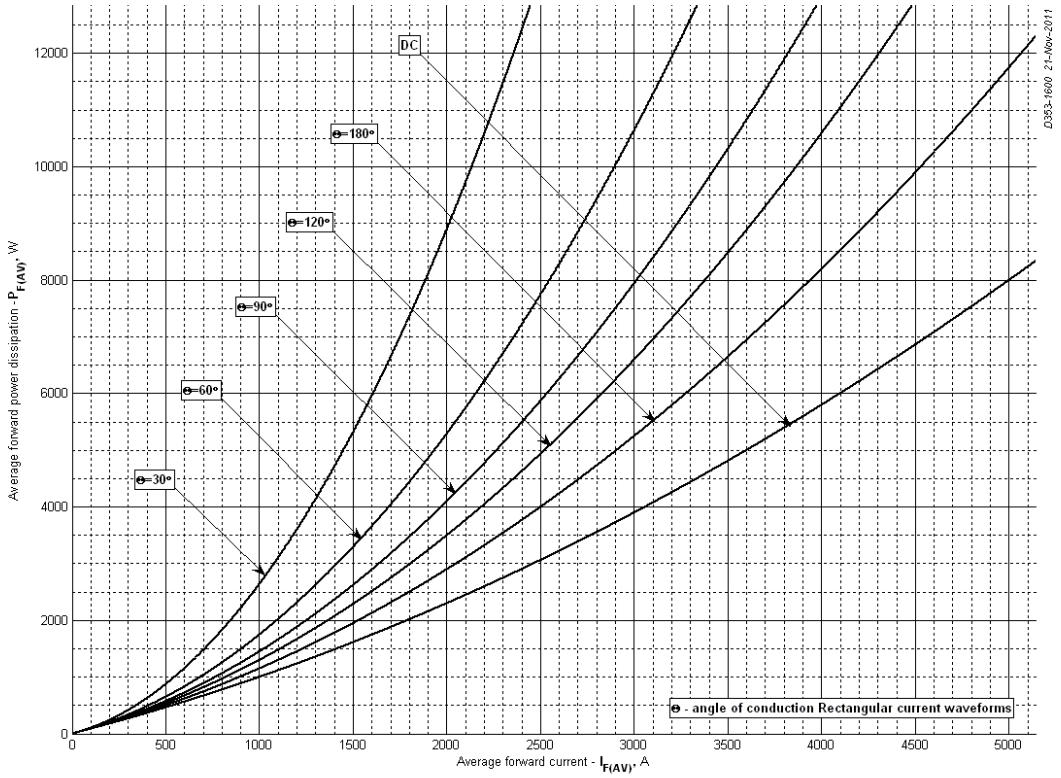

Fig 8 – Mean forward power dissipation P_{FAV} vs. Mean forward current I_{FAV} for rectangular current waveforms at different conduction angles and for DC (f=50Hz, DSC)

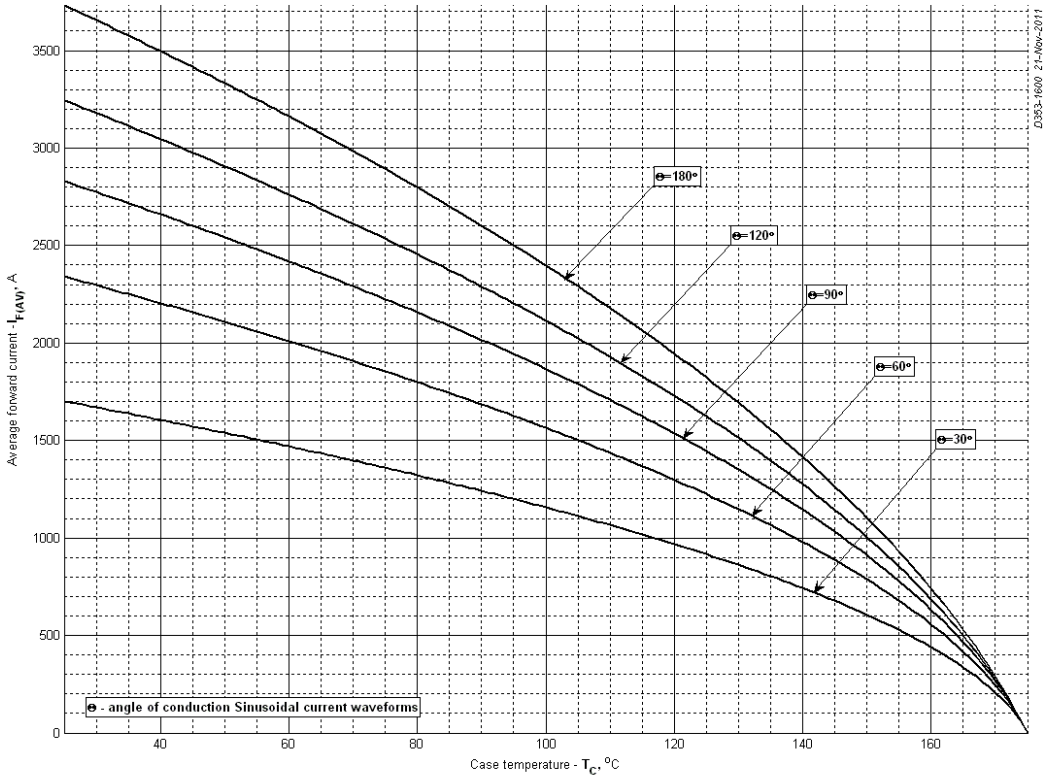

Fig 9 – Mean forward current I_{FAV} vs. Case temperature T_C for sinusoidal current waveforms at different conduction angles (f=50Hz, DSC)

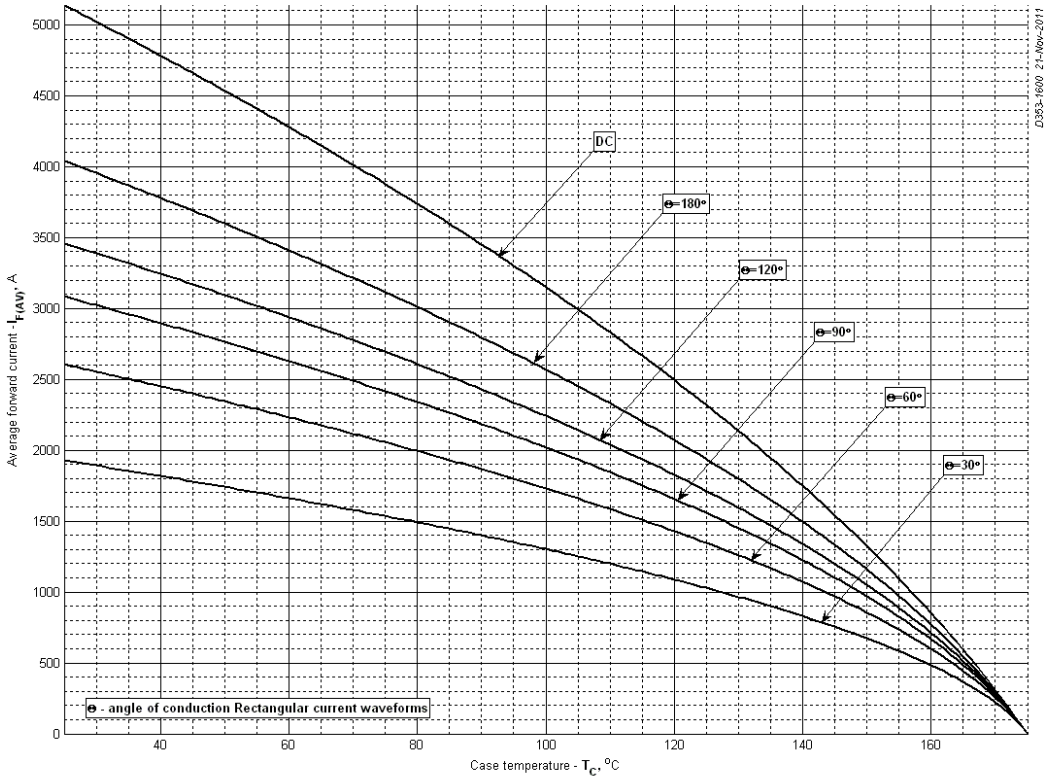

Fig 10 - Mean forward current I_{FAV} vs. Case temperature T_C for rectangular current waveforms at different conduction angles and for DC (f=50Hz, DSC)

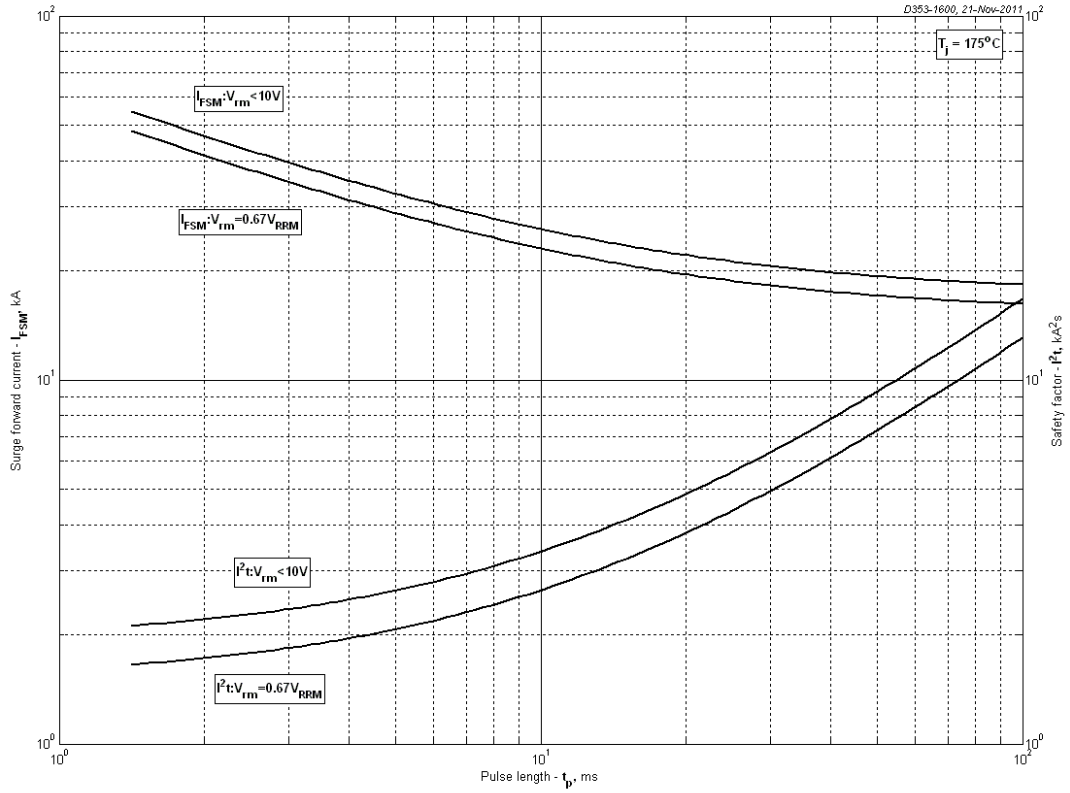

Fig 11 – Maximum surge and I^2t ratings

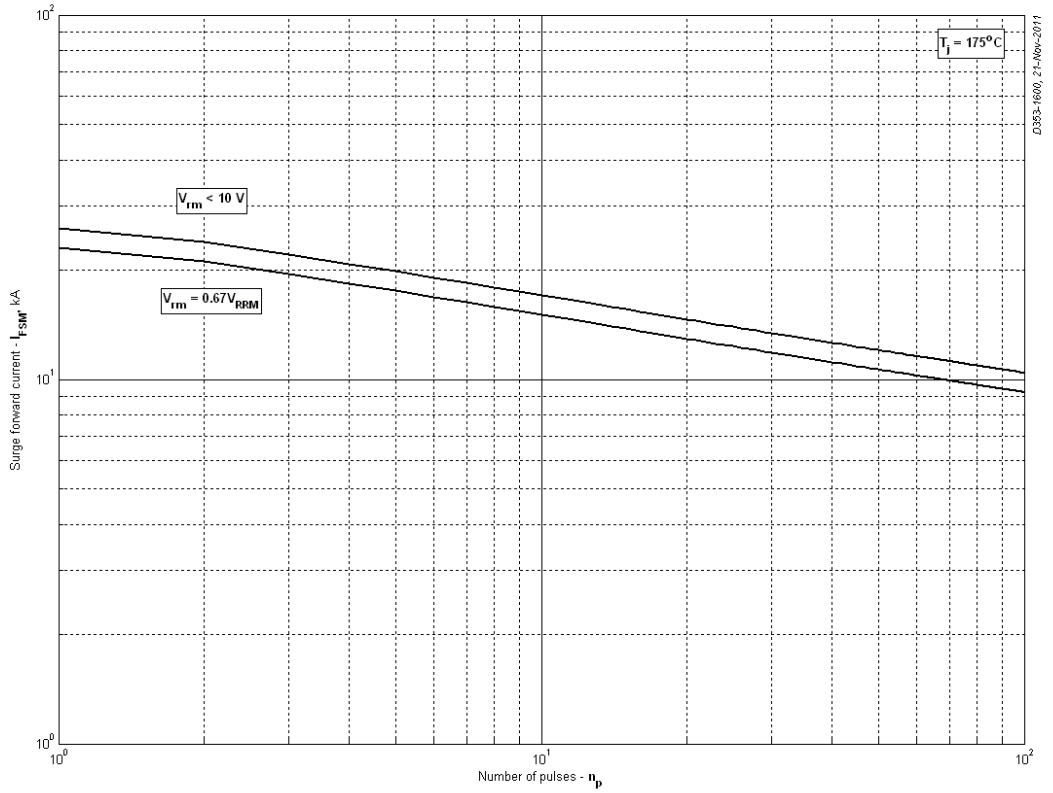

Fig 12 - Maximum surge ratings

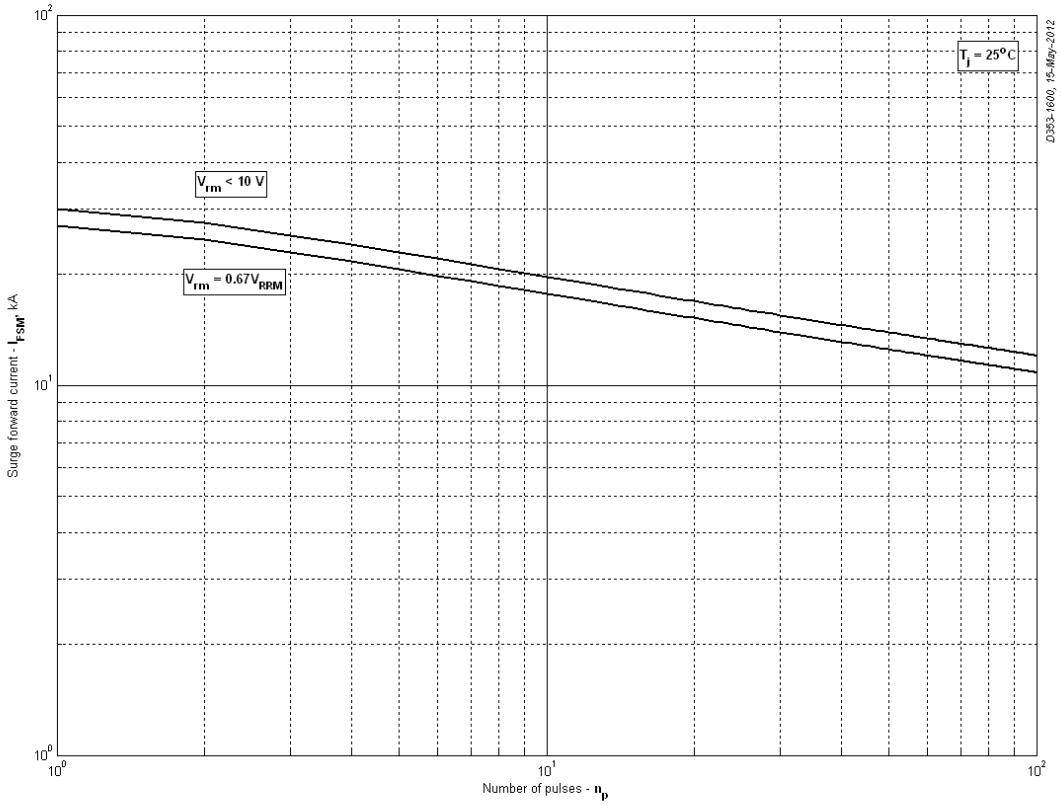

Fig 13 - Maximum surge ratings