

High power cycling capability
 Low on-state and switching losses
 Optimized for line frequency rectifiers
 Designed for traction and industrial applications

Power Rectifier Avalanche Diode Type DA123-320-18

Average forward current				I_{FAV}	320 A			
Repetitive peak reverse voltage				V_{RRM}	1000 ÷ 1800 V			
V_{RRM}, V	1000	1100	1200	1300	1400	1500	1600	1800
Voltage code	10	11	12	13	14	15	16	18
$T_j, ^\circ C$	- 60 ÷ 150							

MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{FAV}	Average forward current	A	320 370	$T_c=110\ ^\circ C$; Double side cooled; $T_c=100\ ^\circ C$; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FRMS}	RMS forward current	A	503	$T_c=110\ ^\circ C$; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FSM}	Surge forward current	kA	5.5 6.3	$T_j=T_{j\ max}$ $T_j=25\ ^\circ C$	180° half-sine wave; $t_p=10\ ms$; single pulse; $V_R=0\ V$
			6.0 6.9	$T_j=T_{j\ max}$ $T_j=25\ ^\circ C$	180° half-sine wave; $t_p=8.3\ ms$; single pulse; $V_R=0\ V$
I^2t	Safety factor	$A^2s \cdot 10^3$	150 195	$T_j=T_{j\ max}$ $T_j=25\ ^\circ C$	180° half-sine wave; $t_p=10\ ms$; single pulse; $V_R=0\ V$
			145 195	$T_j=T_{j\ max}$ $T_j=25\ ^\circ C$	180° half-sine wave; $t_p=8.3\ ms$; single pulse; $V_R=0\ V$
BLOCKING					
V_{RRM}	Repetitive peak reverse voltage	V	1000÷1800	$T_{j\ min} < T_j < T_{j\ max}$; 180° half-sine wave; 50 Hz	
$V_{(BR)}$	Breakdown voltage	V	1250÷2250	$T_j=25\ ^\circ C$; $I_{br}=100\ mA$; $t_p = 10\ ms$; 5 Hz	
V_R	Reverse continuous voltage	V	$0.75 \cdot V_{RRM}$	$T_j=T_{j\ max}$	
P_{RSM}	Surge reverse power dissipation	kW	16	$T_j= T_{j\ max}$; $t_p = 100\ \mu s$; 180° half-sine current waveforms; single pulse	
THERMAL					
T_{stg}	Storage temperature	$^\circ C$	- 60 ÷ 50		
T_j	Operating junction temperature	$^\circ C$	- 60 ÷ 150		
MECHANICAL					
F	Mounting force	kN	5.0 ÷ 7.0		
a	Acceleration	m/s^2	50	Device unclamped	
			100	Device clamped	


CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions	
ON-STATE					
V_{FM}	Peak forward voltage, max	V	1.60	$T_j=25\text{ }^\circ\text{C}; I_{FM}=1005\text{ A}$	
$V_{F(TO)}$	Forward threshold voltage, max	V	0.95	$T_j=T_{j,max};$	
r_T	Forward slope resistance, max	$m\Omega$	1.050	$0.5\pi I_{FAV} < I_T < 1.5\pi I_{FAV}$	
BLOCKING					
I_{RRM}	Repetitive peak reverse current, max	mA	35	$T_j=T_{j,max};$ $V_R=V_{RRM}$	
THERMAL					
R_{thjc}	Thermal resistance, junction to case, max	$^\circ\text{C/W}$	0.0700	Direct current	Double side cooled
R_{thjc-A}			0.1540		Anode side cooled
R_{thjc-K}			0.1260		Cathode side cooled
R_{thck}	Thermal resistance, case to heatsink, max	$^\circ\text{C/W}$	0.0100	Direct current	
MECHANICAL					
w	Weight, typ	g	65		
D_s	Surface creepage distance	mm (inch)	11.74 (0.462)		
D_a	Air strike distance	mm (inch)	11.60 (0.457)		

PART NUMBERING GUIDE

DA	123	320	18	N
1	2	3	4	5

1. DA — Avalanche Diode
2. Design version
3. Average forward current, A
4. Voltage code
5. Ambient conditions: N – normal; T – tropical

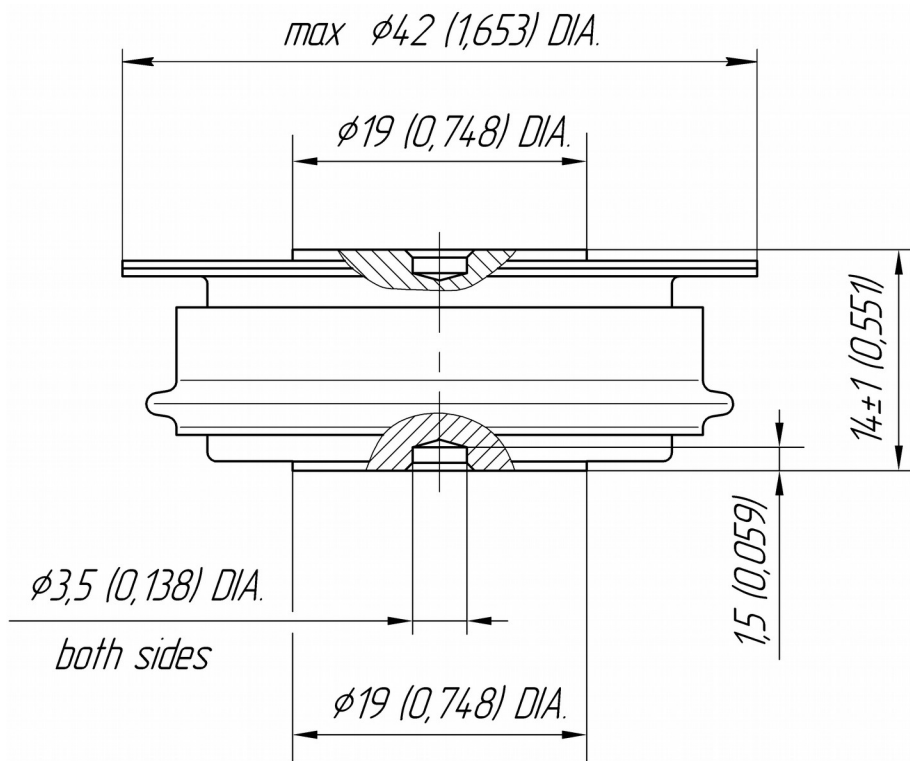

All dimensions in millimeters (inches)