

High power cycling capability
 Low on-state and switching losses
 Optimized for line frequency rectifiers
 Designed for traction and industrial applications

Power Rectifier Avalanche Diodes Type DA253-2000-18

Average forward current				I_{FAV}		2000 A		
Repetitive peak reverse voltage				V_{RRM}		1000 ÷ 1800 V		
V_{RRM} , V	1000	1100	1200	1300	1400	1500	1600	1800
Voltage code	10	11	12	13	14	15	16	18
T_j , °C	- 60 ÷ 175							

MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{FAV}	Average forward current	A	2000 2035	$T_c=101$ °C; Double side cooled; $T_c=100$ °C; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FRMS}	RMS forward current	A	3140	$T_c=101$ °C; Double side cooled; 180° half-sine wave; 50 Hz	
I_{FSM}	Surge forward current	kA	30.0 35.0	$T_j=T_{j\max}$ $T_j=25$ °C	180° half-sine wave; $t_p=10$ ms; single pulse; $V_R=0$ V;
			32.0 37.0	$T_j=T_{j\max}$ $T_j=25$ °C	180° half-sine wave; $t_p=8.3$ ms; single pulse; $V_R=0$ V;
I^2t	Safety factor	$A^2s \cdot 10^3$	4500 6125	$T_j=T_{j\max}$ $T_j=25$ °C	180° half-sine wave; $t_p=10$ ms; single pulse; $V_R=0$ V;
			4245 5680	$T_j=T_{j\max}$ $T_j=25$ °C	180° half-sine wave; $t_p=8.3$ ms; single pulse; $V_R=0$ V;
BLOCKING					
V_{RRM}	Repetitive peak reverse voltages	V	1000÷1800	$T_{j\min} < T_j < T_{j\max}$; 180° half-sine wave; 50 Hz;	
$V_{(BR)}$	Breakdown voltage	V	1250÷2250	$T_j=25$ °C; $I_{br}=100$ mA; $t_p = 10$ ms; 5 Hz	
V_R	Reverse continuous voltages	V	$0.75 \cdot V_{RRM}$	$T_j=T_{j\max}$;	
P_{RSM}	Surge reverse power dissipation	kW	16	$T_j= T_{j\max}$; $t_p = 100$ μs; 180° half-sine current waveforms; single pulse	
THERMAL					
T_{stg}	Storage temperature	°C	- 60 ÷ 50		
T_j	Operating junction temperature	°C	- 60 ÷ 175		
MECHANICAL					
F	Mounting force	kN	24.0 ÷ 28.0		
a	Acceleration	m/s^2	50	Device unclamped	
			100	Device clamped	


CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions
ON-STATE				
V_{FM}	Peak forward voltage, max	V	2.00	$T_j=25\text{ }^\circ\text{C}; I_{FM}=6280\text{A}$
$V_{F(TO)}$	Forward threshold voltage, max	V	0.95	$T_j=T_{j\text{max}}$;
r_T	Forward slope resistance, max	$\text{m}\Omega$	0.220	$0.5 \pi I_{FAV} < I_T < 1.5 \pi I_{FAV}$
BLOCKING				
I_{RRM}	Repetitive peak reverse current, max	mA	100	$T_j=T_{j\text{max}}$; $V_R=V_{RRM}$
THERMAL				
R_{thjc}	Thermal resistance, junction to case, max	$^\circ\text{C}/\text{W}$	0.0180	Double side cooled
R_{thjc-A}			0.0396	Anode side cooled
R_{thjc-K}			0.0324	Cathode side cooled
R_{thck}	Thermal resistance, case to heatsink, max	$^\circ\text{C}/\text{W}$	0.0040	Direct current
MECHANICAL				
w	Weight, typ	g	510	
D_s	Surface creepage distance	mm (inch)	38.84 (1.529)	
D_a	Air strike distance	mm (inch)	22.50 (0.886)	

PART NUMBERING GUIDE

DA	253	2000	18	N
1	2	3	4	5

1. DA — Avalanche Diode
2. Design version
3. Average forward current, A
4. Voltage code
5. Ambient conditions: N – normal; T – tropical

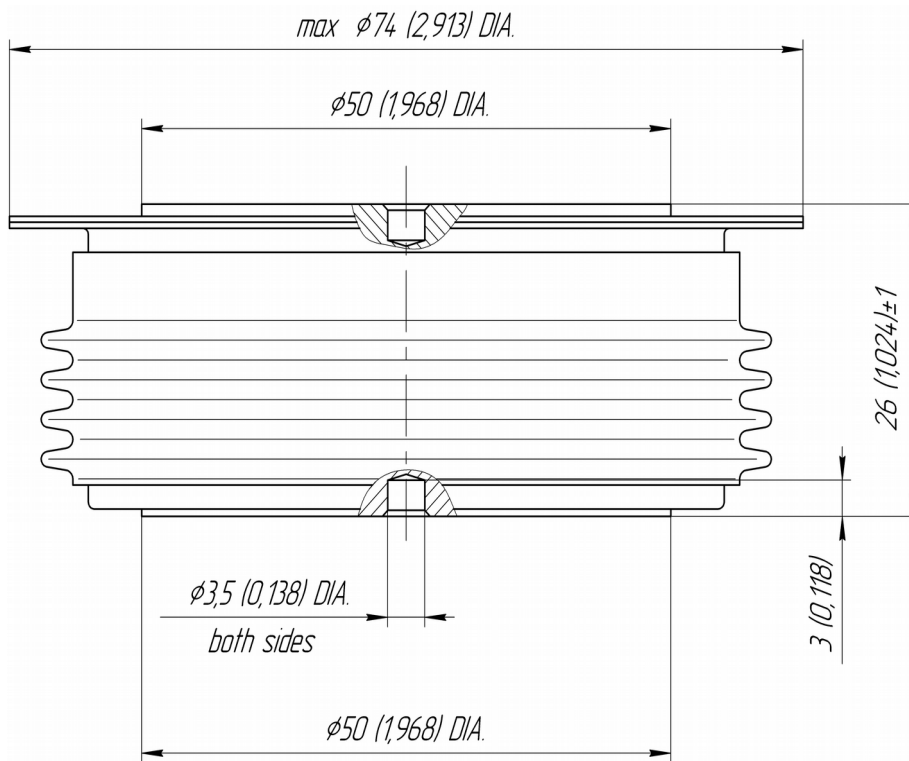

All dimensions in millimeters (inches)