

Optimum power handling
 Low switching losses
 Low reverse recovery charge
 High power cycling capability

Fast Recovery Stud Diode Type DF271-500-14

Mean on-state current	I_{FAV}		500 A		
Repetitive peak reverse voltage	V_{RRM}		1000 ÷ 1400 V		
Reverse recovery time	t_{rr}		4.0 μ s		
V_{RRM} , V	1000	1100	1200	1300	1400
Voltage code	10	11	12	13	14
T_j , °C	- 60 ÷ 150				


MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{FAV}	Average forward current	A	500 660	$T_c=85\text{ }^\circ\text{C}$; $T_c=55\text{ }^\circ\text{C}$; 180° half-sine wave; 50 Hz	
I_{FRMS}	RMS forward current	A	785	$T_c=85\text{ }^\circ\text{C}$; 180° half-sine wave; 50 Hz	
I_{FSM}	Surge forward current	kA	9.0 10.4	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^\circ\text{C}$	180° half-sine wave; 50 Hz ($t_p=10\text{ ms}$); single pulse; $V_R=0\text{ V}$;
			10.0 11.5	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^\circ\text{C}$	180° half-sine wave; 60 Hz ($t_p=8.3\text{ ms}$); single pulse; $V_R=0\text{ V}$;
I^2t	Safety factor	$A^2s \cdot 10^3$	405 540	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^\circ\text{C}$	180° half-sine wave; 50 Hz ($t_p=10\text{ ms}$); single pulse; $V_R=0\text{ V}$;
			415 545	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^\circ\text{C}$	180° half-sine wave; 60 Hz ($t_p=8.3\text{ ms}$); single pulse; $V_R=0\text{ V}$;
BLOCKING					
V_{RRM}	Repetitive peak reverse voltages	V	1000÷1400	$T_{j\text{ min}} < T_j < T_{j\text{ max}}$; 180° half-sine wave; 50 Hz;	
V_{RSM}	Non-repetitive peak reverse voltages	V	1100÷1500	$T_{j\text{ min}} < T_j < T_{j\text{ max}}$; 180° half-sine wave; 50 Hz;single pulse;	
V_R	Reverse continuous voltages	V	$0.75 \cdot V_{RRM}$	$T_j=T_{j\text{ max}}$;	
THERMAL					
T_{stg}	Storage temperature	°C	- 60 ÷ 50		
T_j	Operating junction temperature	°C	- 60 ÷ 150		
MECHANICAL					
M	Tightening torque	Nm	25 ÷ 35		
a	Acceleration	m/s^2	100		

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions
ON-STATE				
V_{FM}	Peak forward voltage, max	V	1.85	$T_j=25\text{ }^\circ\text{C}; I_{FM}=1570\text{ A}$
$V_{F(TO)}$	Forward threshold voltage, max	V	1.20	$T_j=T_{j\text{ max}};$ $0.5\pi I_{FAV} < I_T < 1.5\pi I_{FAV}$
r_T	Forward slope resistance, max	m Ω	0.530	
BLOCKING				
I_{RRM}	Repetitive peak reverse current, max	mA	40	$T_j=T_{j\text{ max}};$ $V_R=V_{RRM}$
SWITCHING				
Q_{rr}	Total recovered charge, max	μC	500	$T_j=T_{j\text{ max}}; I_{FM}=400\text{ A};$ $di_R/dt=-100\text{ A}/\mu\text{s};$ $V_R=100\text{ V};$
t_{rr}	Reverse recovery time, max	μs	4.0	
I_{rrM}	Peak reverse recovery current, typ	A	250	
THERMAL				
R_{thjc}	Thermal resistance, junction to case, max	$^\circ\text{C}/\text{W}$	0.0700	Direct current
MECHANICAL				
w	Weight, typ	g	440	
D_s	Surface creepage distance	mm (inch)	12.4 (4.882)	
D_a	Air strike distance	mm (inch)	12.4 (4.882)	

PART NUMBERING GUIDE							GROUP OF RECOVERY TIME	
DF	271	400		14	H4	N	Group Symbol	H4
1	2	3	4	5	6	7	$t_{rr}, \mu\text{s}$	4.0
1. Fast recovery diode 2. Design version 3. Average forward current, A 4. Polarity: X – Cathode to Stud; Anode to Stud – no symbol 5. Voltage code 6. Group of reverse recovery time 7. Ambient conditions: N – normal; T – tropical								

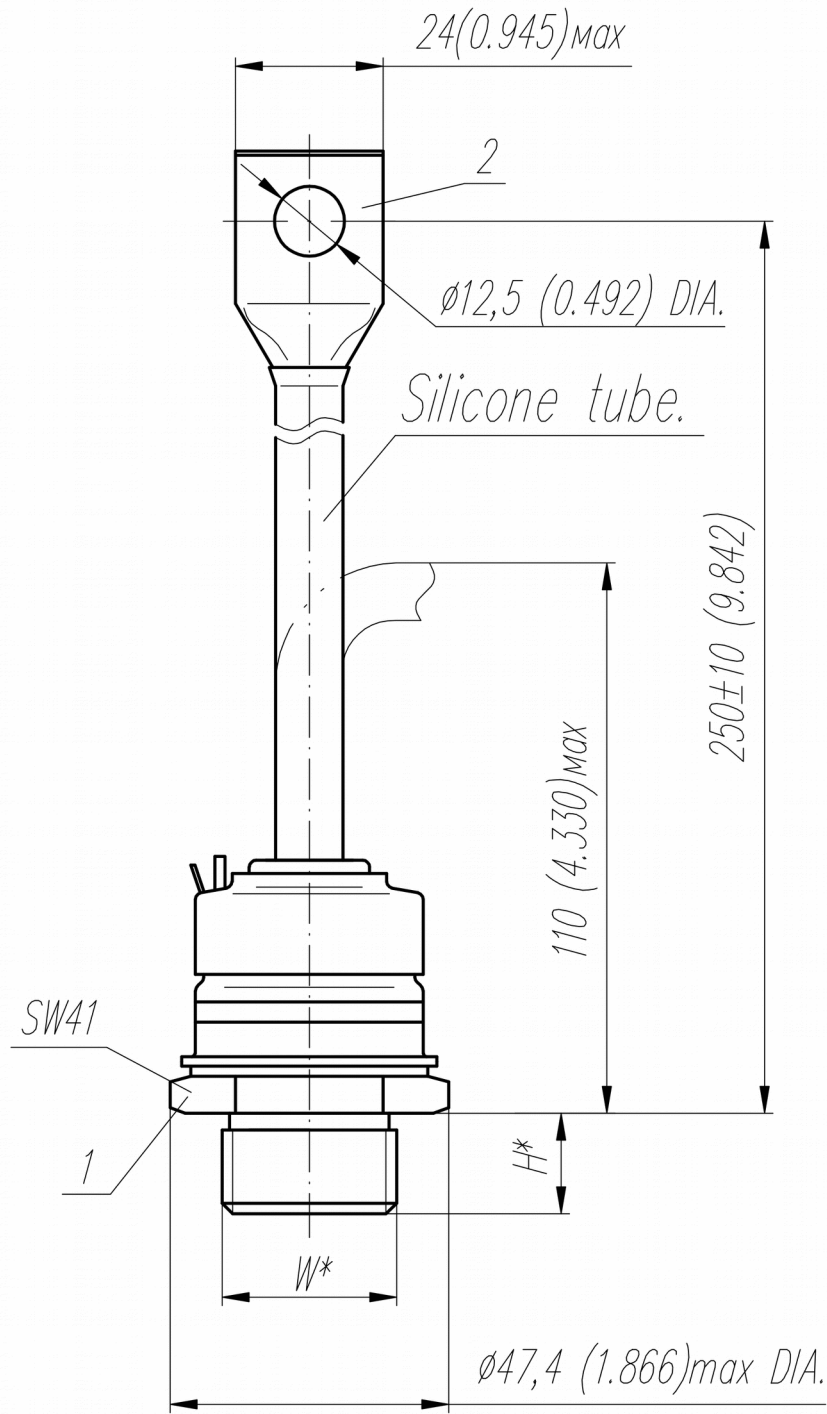

Type of screw	W	H
Metric Screw	M24x1,5 – 8g	19

Polarity		Example of code designation	Reference designation	Colors	
				Anode	Cathode
Normal	Anode to stud	DF271-500-14	∇	-	Red tube
Reverse	Cathode to stud	DF271-500X-14	∇	Black tube	-

All dimensions in millimeters (inches)